


Tomcat 中配置 pebble 博客系统

1. 下载解压后，找到 pebble.war。
2. 复制到 tomcat 的 webapps 目录下
3. 在 \$TOMCAT_HOME/conf/tomcat-users.xml 文件中，配置
<user username="admin" password="admin" roles="blog-owner,blog-contributor"/>
4. 输入 <http://localhost:8080/pebble>，就会进入下图所示

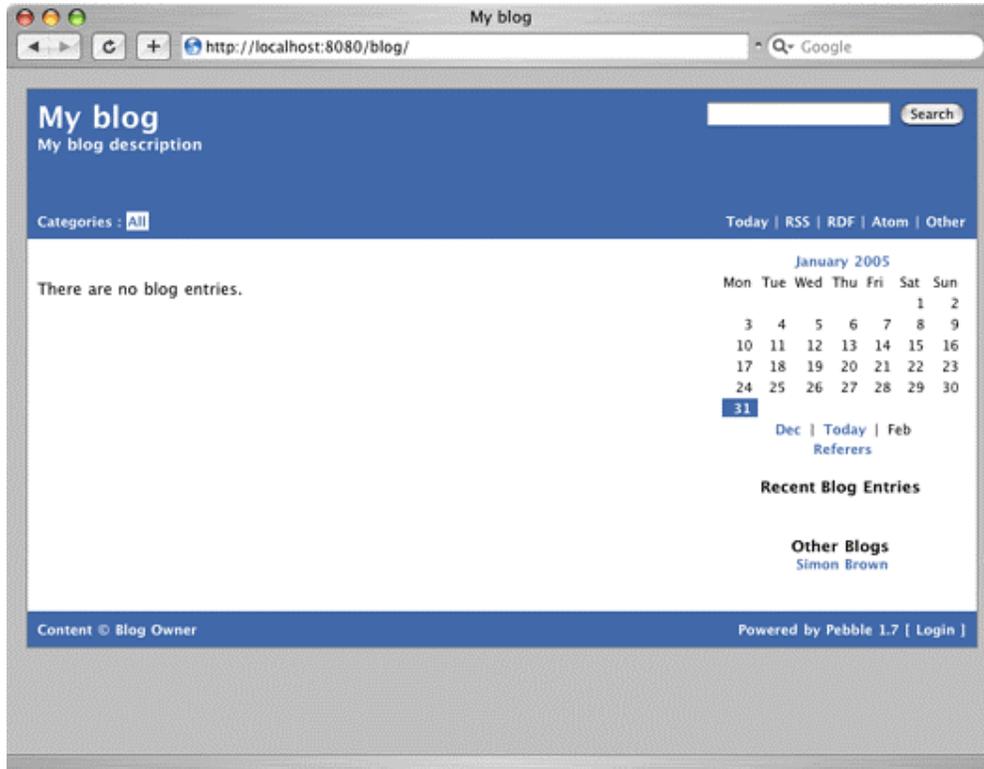

5. `$Tomcat\webapps\pebble\WEB-INF\classes\pebble.properties`
修改 `blog.multiUser=true`，（默认是 `false`）
6. 点击图中 Login 超连接，进入管理员密码验证表单，输入 `admin` 密码 `admin` 即可以登陆博客系统。如图所示，即进入了 pebble 管理后台。

My blog
My blog description

Blog administration

Content	New blog entry Blog this Drafts Templates Files Images New category Categories New static page Static pages
Responses	Approved (0) Pending (0) Rejected (0)
Maintenance	Blog properties Plugins View configuration Reload Utilities View themes Edit theme (custom)
Logs	Referers (unfiltered) Requests Referer filters Log summary Log ZIP file
Export Blog	ZIP file RSS RSS with responses RDF Atom
Other	Pebble home Documentation Issue tracker Changelog

Blog entries : 0 | Responses : 0 | Last modified : 01 January 1970 01:00:00 GMT
Requests today : 4 | Uptime : 0 days, 00:00:34 | JVM memory : Using 7,030 KB of 11,608 KB (GC)
Logged in as admin | Logout | Pebble 1.9 (built 11 August 2005 21:26:22 +0100)

There are no blog entries for the chosen time period.

Content © Blog Owner

7. 点击“Blog properties”选项，进入博客系统的属性设置。可以修改各种属性，设置为中文。我们会做视频专题讲解。